

## DS-3E0108-O 8-Port Fast Ethernet Switch




DS-3E0108-O provides eight 10/100 Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 8 × 10/100 Mbps RJ45 Port
- Easy Plug-and-Play Installation
- Desk- and Wall-Mounting
- Rugged Metal Case, Exquisite and Beautiful Design

## ▪ Specification


General	
Shell	Metal material, fan-free design
Net Weight	0.2 kg (0.441 lb)
Gross Weight	0.35 kg (0.77 lb)
Dimensions (W × H × D)	142.4 mm × 25.6 mm × 53.1 mm (5.606" × 1.007" × 2.09")
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	5 V DC, 1 A
Max. Power Consumption	5 W
Power Consumption in Idle	< 5 W
Surge Protection	2 kV
Network Parameters	
Ports	8 × 10/100 Mbps RJ45 port
MAC Address Table	2 K
Switching Capacity	1.6 Gbps
Packet Forwarding Rate	1.19 Mpps
Internal Cache	0.768 Mbits
Approval	
EMC	FCC (47 CFR Part 15, Subpart B),CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020)
Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006)

## ▪ Typical Application

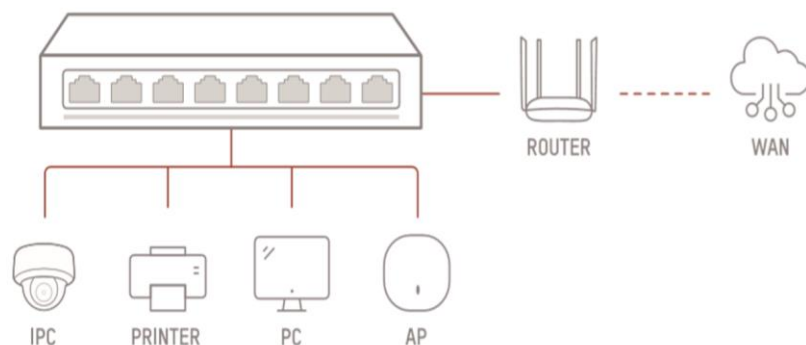


▪ **Physical Interface**

Front Panel


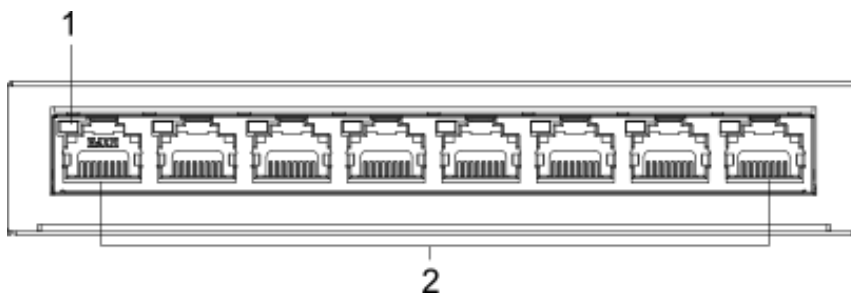


Rear Panel

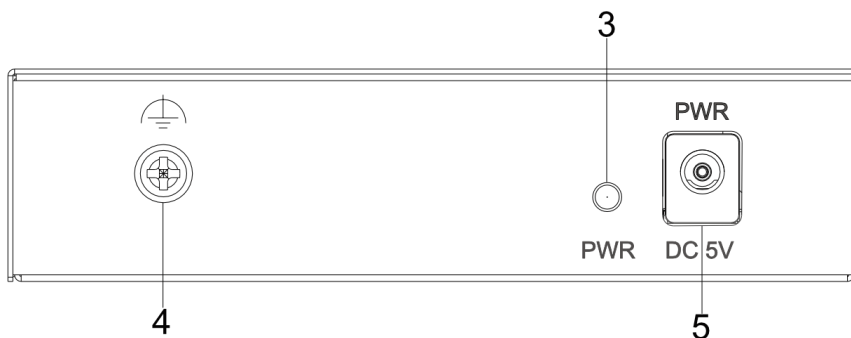

No.	Indicator/Port
1	LINK/ACT Indicator
2	10/100 Mbps RJ45 Port
3	PWR Indicator
4	Grounding Terminal
5	Power Supply

▪ **Dimension (Unit: mm)**

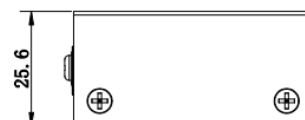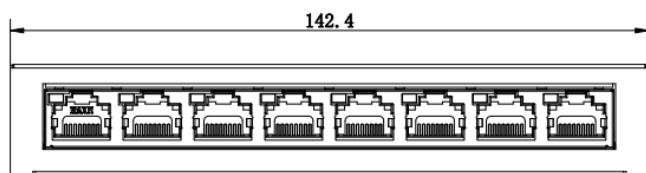

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

