

DS-C30S-04HO 4-Channel HDMI Output Board




The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Provides 4 HDMI ports and supports YUV 444 output.
- Supports HDMI composite audio output.

▪ Specification

Chassis	
Occupied Slot	Output slot
Video Output	
Video Output Interface Type	HDMI 1.4
Video Output Interfaces	4
Video Output Resolution	1920 × 1200@60 Hz, 1600 × 1200@60 Hz, 1920 × 1080@60 Hz, 1680 × 1050@60 Hz, 1280 × 720@60 Hz, 1280 × 1024@60 Hz, 1024 × 768@60 Hz Supports LED screen, custom resolution output, and load-based output. The product of the length and width must be less than 2.6 MP.
Max. Video Output Resolution	1080P
Loading Capacity for Video Output to LED	Single port load 2600000, Width 288 - 3840, Height 288 - 2160;
Audio Output	
Audio Output Interface Type	HDMI composite audio
Audio Output Interfaces	4

▪ Dimension

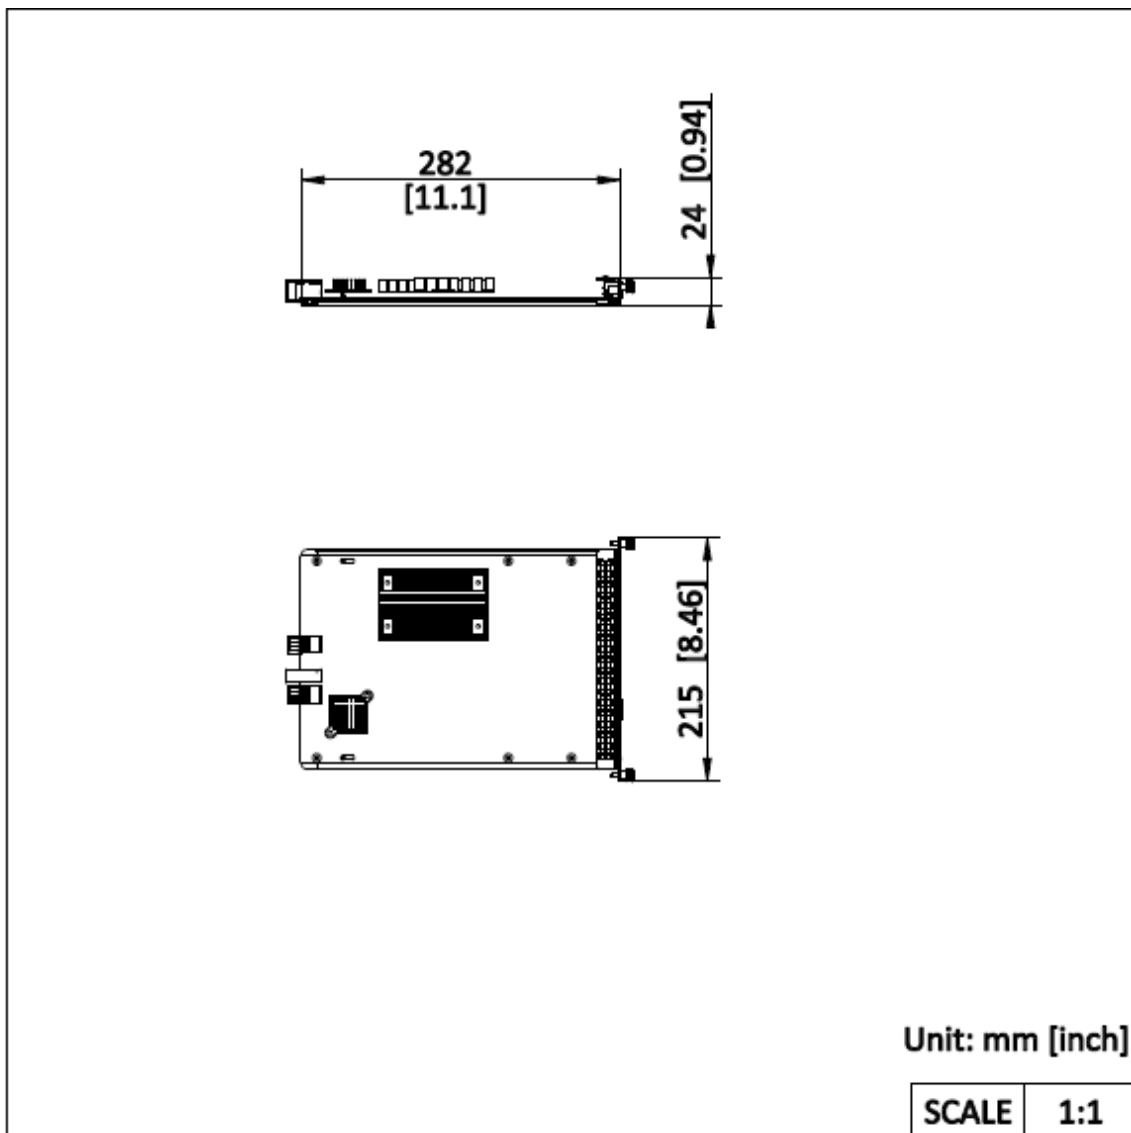

▪ Accessory

▪ Optional

DS-C30S-02DPI/4K



See Far, Go Further



www.hikvision.com
support@hikvision.com

