

22" LED FHD Monitor

MW3222-L



Key Features

- True color display
- Resolution is up to at 1920*1080
- Wide viewing angle:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support7*24working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Built-in 3D COMB filter and 3D Noise Reduction
- 5ms response time for no motion blur, judder or ghosting
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan




Specifications

| Model | MW3222-L |
|-----------------------|--|
| Display | |
| Display Type | LED Backlight |
| Screen Size | 21.5" |
| Aspect Ratio | 16:9 |
| Pixel Pitch(mm) | 0.2482*0.2482 |
| Max Resolution | 1920*1080 |
| Brightness | 250 cd/m ² |
| Contrast | 3000:1 |
| Response Time | 7ms |
| Color | 16.7M |
| Viewing Angle | Horizontal 178°, Vertical 178° |
| Refresh Rate | 60Hz |
| Interface | |
| Input | VGA*1, HDMI*1 |
| OSD | |
| Multi- Language | 8 (English, France, Spanish, German, Russia, Korea, Japanese, Simplified Chinese) |
| Mounting | |
| VESA | 100mm*100mm |
| Wall-mounted Thread | 4-M4 Threaded hole |
| General | |
| Power supply | DC 12V, 2A |
| Consumption | 22 W(on) |
| Consumption | <0.5 W(Standby) |
| Operation Temperature | 0°C ~ 40 °C (32°F~104°F) |
| Operating Humidity | 20%~85% (No Condensation) |
| Storage Temperature | -10°C ~50°C (14°F~122°F) |
| Storage Humidity | 10%~90% (No Condensation) |
| Dimension(W*H*D) | 508.02mm*392.87mm*200mm (With Pedestal) |
| | 20"*15.47"*7.87"(With Pedestal) |
| Package(W*H*D) | 566mm*382mm*166mm (22.28"*15.04"*6.54") |
| Weight | Net Weight:2.3Kg (5.07Lb) Gross Weight:3.4Kg(7.5Lb) |
| Accessory | |
| Standard | Adapter, Pedestal, Quick Guide |
| Optional | Hanging bracket(Model: HB-4022-E) |




Appearance

Dimensions

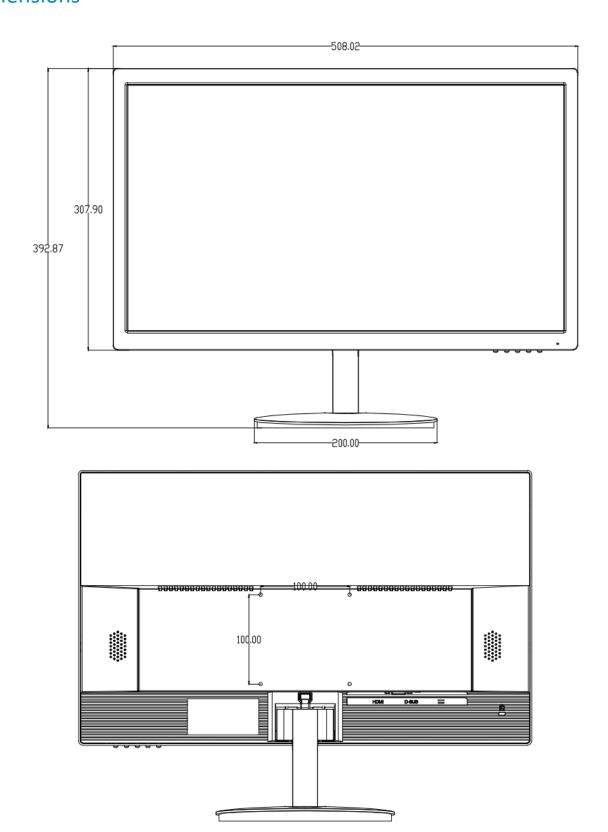



Interfaces

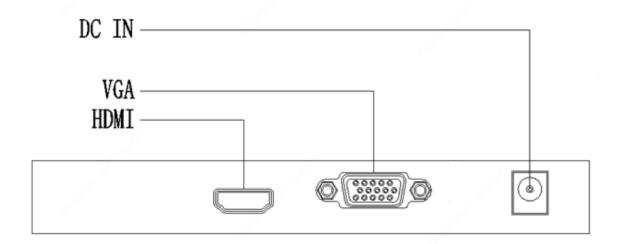

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://www.uniview.com

©2022 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.