


Unmanaged Ethernet Switch

NS-1010-5T

Overview

The NS1010 series unmanaged Ethernet switch is a plug-and-play device with no configuration required. The fanless silent design completely eliminates the loud noise caused by other small switches used in the office. The small size and exquisite appearance save the space effectively. It can be widely used in industries such as network video management, hotels, campuses, small and medium-sized enterprises network, etc.

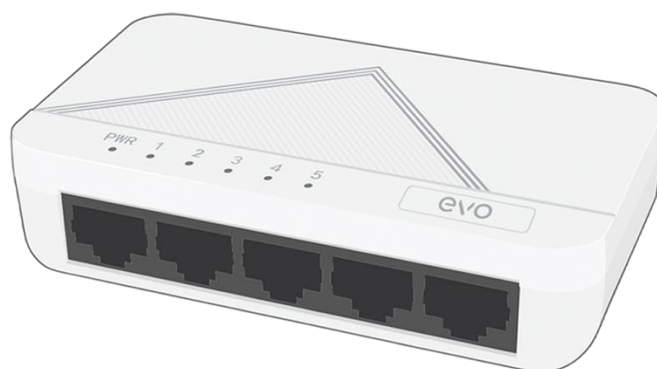

Features

- Supports IEEE802.3 and IEEE802.3u standards.
- Supports 10/100Mbps or 10/100/1000Mbps self-adaptive Ethernet port.
- Supports auto MDI/MDIX.
- Supports IEEE802.3 flow control for full-duplex mode and backpressure for half-duplex mode.

Specifications

Model NS-1010-5T	
Hardware Specification	
Ports Type	5 x 10/100Mbps port (RJ45)
Network Media	10Base-T: Cat3, 4, 5 or higher UTP/STP (≤100m) 100Base-TX: Cat5 or higher UTP/STP (≤100m)
Switching capacity	1Gbps
Forwarding performance	0.744Mpps
MAC	2K
Jumbo Frame	15K

Transfer Mode	Store-and-forward
Dimensions (W×D×H)	Product: 92*51*21.5mm Packaging: 93*82*51mm
Carton Information	Carton dimensions: 435*280*395mm Carton quantity: 100PCS Carton weight: 14.2kg
Weight	Product: 0.062kg Packaging: 0.132kg
Power Supply	Adapter input voltage: AC 100V to 240V Switch input voltage: 5V, 1A
Mount Method	Desktop mount, wall mount
Cooling Fans	0
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating humidity	10%~90% (non-condensing)
Storage Temperature	-20°C to 70°C
Storage Humidity	5% to 90% RH, noncondensing
Indicator	POWER Steady on: AC input is normal, POWER Off: No AC input, LINK/ACT Off: No link, LINK/ACT Flashing: Transmitting data, LINK/ACT Steady on: Linked

*Product specifications and availability are subject to change without notice. EVO | evolution.com.kz