

DS-3E0526P-E (B) **24 Port Gigabit Unmanaged PoE Switch**



- Layer 2 network switch designed for video data transmission
- 24 x 10/100/1000 Mbps ethernet port, 1 x 10/100/1000 Mbps uplink ethernet port and 1 x 10/100/1000 Mbps uplink SFP port
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z network standards available
- IEEE 802.3 af & at high PoE power supply
- Store-and-forward switching
- Safe and reliable using 6 kV high surge protection
- Plug and play ensures simplicity and convenience.

▪ Specification


General	
Shell	Metal material
Net Weight	2.88 kg (6.35 lb)
Gross Weight	3.74 kg (8.25 lb)
Dimensions (W × H × D)	440.0 mm × 44.0 mm × 220.8 mm (17.3" × 1.7" × 8.7")
Operating Temperature	−10 °C to 55 °C (14 °F to 131 °F)
Storage Temperature	−40 °C to 85 °C (−40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	100~240 V AC, 50/60 Hz, Max. 6.5 A
Max. Power Consumption	400 W
Power Consumption in Idle	30 W
Installation Mode	Desk-Mounted,Rack (equipped with mounting ears);
Surge Protection	6 kV
Network Parameters	
Ports	24 × Gigabit PoE port;1 × Gigabit RJ45 port;1 × Gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	52 Gbps
Packet Forwarding Rate	38.69 Mpps
Internal Cache	4.1 Mbits
PoE Power Supply	
PoE Standard	IEEE 802.3af,IEEE 802.3at
PoE Power Pin	End-span: 1/2(+), 3/6(-)
PoE Port	PoE: Ports 1 to 24
Max. Port Power	30 W
PoE Power Budget	370 W
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006)

▪ Available Model

DS-3E0526P-E(B)

Physical Interface

Front Panel

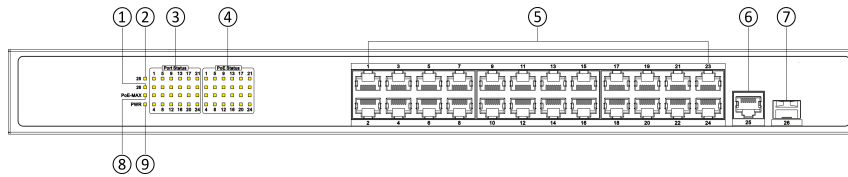


Rear Panel



No.	Indicator/Port	Description
①	Gigabit SFP Fiber Optical Port Indicator	● Solid on: The gigabit SFP fiber optical port is connected. ● Flashing: The gigabit SFP fiber optical port is transmitting data. ● Unlit: The gigabit SFP fiber optical port is disconnected or connection is abnormal.
②	Gigabit RJ45 Port Indicator	● Solid on: The gigabit RJ45 port is connected. ● Flashing: The gigabit RJ45 port is transmitting data. ● Unlit: The gigabit RJ45 port is disconnected or connection is abnormal.
③	Port Status Indicator	● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
④	PoE Status Indicator	● Solid on: The switch provides power supply to a powered device (PD) normally. ● Unlit: The switch is disconnected to a PD, or provides power supply to a PD abnormally.
⑤	Gigabit PoE RJ45 Port	Used for connection to a PD via a network cable.
⑥	Gigabit RJ45 Port	Used for connection to another device via a network cable.
⑦	Gigabit SFP Fiber Optical Port	Used for connection to another device via an optical fiber when the port is plugged into with an optical module.
⑧	PoE-MAX Indicator	● Solid on: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected. ● Unlit: The switch does not supply power to a PD, or supplies power to a PD normally and its output power does not reach the upper limit. The PoE-MAX indicator will be unlit in five seconds after the output power of the switch returns to normal.
⑨	PWR Indicator	● Solid on: The switch is powered on normally. ● Unlit: No power supply connected or power supply is abnormal.
⑩	Grounding Terminal	Used for connection to a grounding cable to protect the switch from lightning.
⑪	Power Supply	Use the attached power cord to connect the switch to a power socket.

Dimension

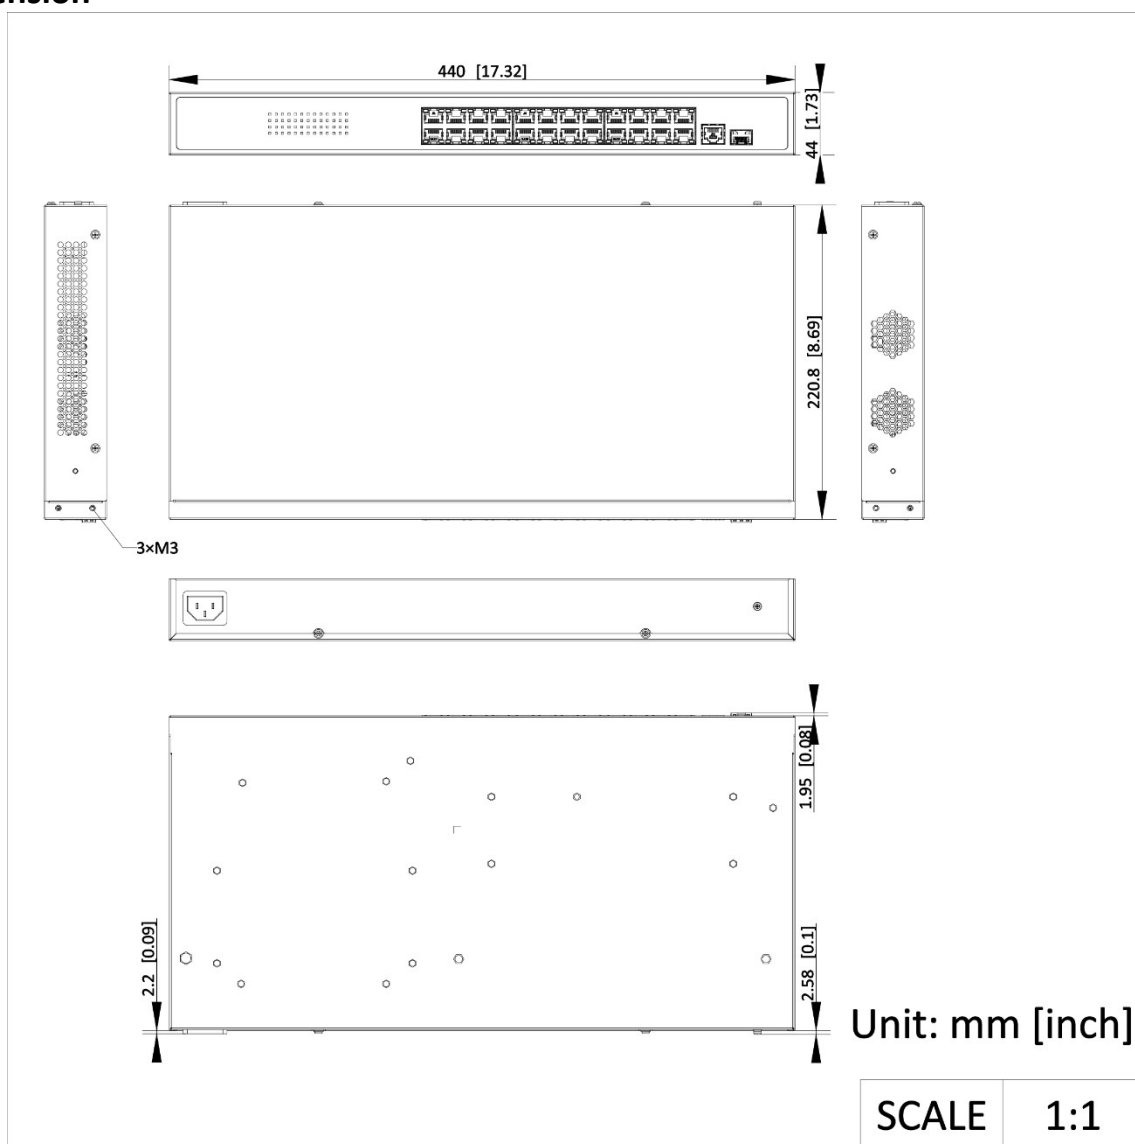

Accessory

Optional

HK-SFP-1.25G-20-1550 SFP Module	HK-SFP-1.25G-20-1310 SFP Module	HK-SFP-1.25G-1310-DF-MM SFP Module	HK-SFP-1.25G-20-1310-DF SFP Module
			

See Far, Go Further



www.hikvision.com
support@hikvision.com

